

3A Composites Asia Pacific Pte. Ltd.

300 Beach Road
#10-06 The Concourse
Singapore 199555
Telephone: (65) 6303 9750
Telefax: (65) 6303 9751
Email: sales@alucobond.com.sg
www.alucolux.com
www.alucobond.com.sg

3A Composites India Pvt. Ltd.

Bldg. No. 11, Unit No. 1112, 1st Floor
Solitaire Corporate Park
Mathuradas Vasani Marg
Andheri (East)
Mumbai - 400 093, India
Telephone: (91) 22 4256 4500
Telefax: (91) 22 4010 4132
Email: alucobond.india@3acomposites.com
www.alucobond.in

3A Composites GmbH

Alusingenplatz 1
78224 Singen
Germany
Telephone: (49) 7731 941 2060
Telefax: (49) 7731 941 2845
Email: info@alucobond.com
www.alucobond.com

3A Composites Middle East (Branch)

Almas Tower, JLT
P.O. Box: 343522
Dubai, UAE
Mobile: (97) 1 58 535 1721
Email: basel.massis@3acomposites.com
www.alucobond.com

3A Composites (China) Ltd.

Room 1902-1903
Hongkong Prosperity Tower
Mengzi Road No. 763
Huangpu Shanghai
China
Telephone: (86) 21 6315 8550
Email: alucobond.china@3acomposites.com
www.alucobond.com.cn

3A Composites USA

721 Jetton Street, Suite 325
Davidson, NC 28036
United States of America
Tel: (1) 800 626 3365
Email: info.usa@3acomposites.com
www.alucobondusa.com

ALUCOLUX®

ANODIZED LOOK

The natural beauty of satin-smooth metal



SOPHISTICATED AND TIMELESS

ALUCOLUX® anodized look series offers a sleek and modern satin-smooth metal appearance admired over the world by architects and designers. ALUCOLUX® anodized look is used where architects focus on high quality and appearance – for rainscreen façades, wall cladding, roof perimeter detailing, curved features, column casings, along with many other interior and exterior architectural applications.

Designed to meet EURAS industrial standards, it harmonizes with anodized elements like window frames and doors for a beautiful seamless amalgamation.

GENERAL INFORMATION

ALUCOLUX® is a solid aluminium sheet that features multi-coat, multi-bake process on a continuous coil coating line using the highest grade of PVDF/FEVE paint system. The multiple layers are individually cured at temperatures of between 200-260°C. The quality of the coating is tested according to standards established by E.C.C.A. (European Coil Coating Association) of which 3A Composites is a member. Fluorocarbon (PVDF) coating systems combine good formability and excellent surface durability. They are extremely resistant to weathering, strong solar radiation and pollution.

With top-grade fluoropolymer coating, applied using a continuous coil coating process, it ensures durability, weather resistance, and colour retention. ALUCOLUX® anodized look panels can be shaped creatively and transformed into any design concepts using standard processing methods making them desirable for designers and architects.

ALUCOLUX® anodized look balances aesthetics with practicality, making it a reliable choice focusing on quality and appearance.

The colour reproduction in this chart is subject to printing limitations. For exact colour matching, request actual colour samples.


To avoid possible reflection variations, it is recommended to install the panels in the same direction as marked on the protective peel-off-foil. Colour variations may occur between panels originating from different production batches. To ensure colour consistency, the total requirement for a project must be placed in one order.

For more information please refer to your nearest ALUCOLUX® representative or visit www.alucolux.com


Make sophistication and class the benchmark of your designs with our satin-smooth range.



SATIN BROWN

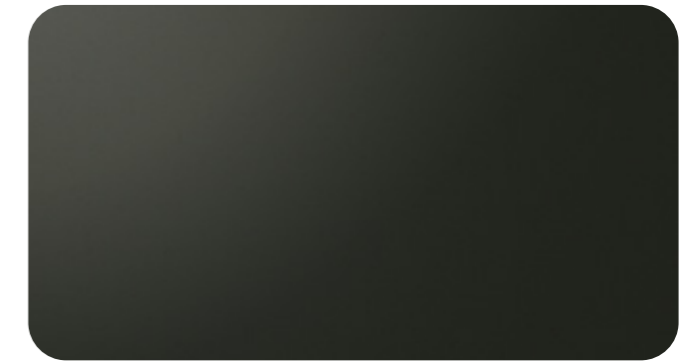


C34

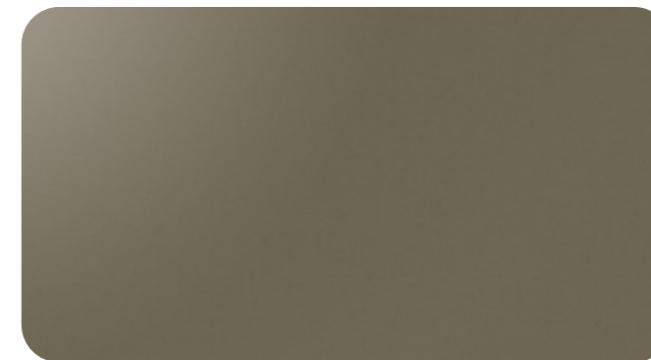

C32



C0/EV1

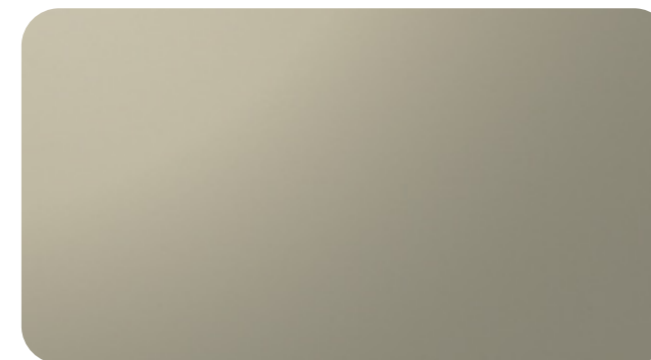

C31



C2 LIGHT GOLD

N.B: Colours and patterns shown here may differ slightly with that on the actual panels

