

**3A Composites Asia Pacific Pte. Ltd.**

300 Beach Road  
#10-06 The Concourse  
Singapore 199555  
Telephone: (65) 6303 9750  
Telefax: (65) 6303 9751  
Email: sales@alucobond.com.sg  
www.alucolux.com  
www.alucobond.com.sg

**3A Composites India Pvt. Ltd.**

Bldg. No. 11, Unit No. 1112, 1st Floor  
Solitaire Corporate Park  
Mathuradas VasANJI Marg  
Andheri (East)  
Mumbai - 400 093, India  
Telephone: (91) 22 4256 4500  
Telefax: (91) 22 4010 4132  
Email: alucobond.india@3acomposites.com  
www.alucobond.in

**3A Composites GmbH**

Alusingenplatz 1  
78224 Singen  
Germany  
Telephone: (49) 7731 941 2060  
Telefax: (49) 7731 941 2845  
Email: info@alucobond.com  
www.alucobond.com

**3A Composites Middle East (Branch)**

Almas Tower, JLT  
P.O. Box: 343522  
Dubai, UAE  
Mobile: (97) 1 58 535 1721  
Email: basel.massis@3acomposites.com  
www.alucobond.com

**3A Composites (China) Ltd.**

Room 1902-1903  
Hongkong Prosperity Tower  
Mengzi Road No. 763  
Huangpu Shanghai  
China  
Telephone: (86) 21 6315 8550  
Email: alucobond.china@3acomposites.com  
www.alucobond.com.cn

**3A Composites USA**

721 Jetton Street, Suite 325  
Davidson, NC 28036  
United States of America  
Tel: (1) 800 626 3365  
Email: info.usa@3acomposites.com  
www.alucobondusa.com

# ALUCOLUX®

## WOOD AND STONE LOOK

Nature's own colours





## WOOD LOOK

ALUCOLUX® wood look boasts a wide array of contemporary wood patterns, maintaining the exceptional material characteristics. These include remarkable flatness, impressive rigidity, superb formability, lightweight construction and exceptional resistance to weathering, making it an ideal choice for both interior and exterior cladding applications.


The utilization of a premium paint system, applied through a continuous coil-coating method, guarantees the long-term preservation of the wood look, ensuring it remains intact for decades to come. These captivating patterns are available in widths of 1000mm, 1250mm, 1500mm and 1575mm.




A2001



A2002

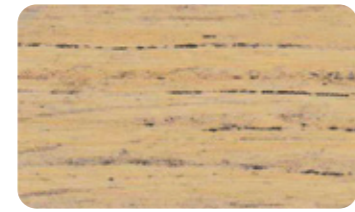

A2003



A2004




A2005



A2006




A2007



A2008



A2009




A2010

N.B: Colours and patterns shown here may differ slightly with that on the actual panels


## STONE LOOK

ALUCOLUX®, known for its versatility, is now available in a range of stone patterns. These patterns are achieved through a specialized coating process that replicates the exquisite appearance of natural stone surfaces. The PVDF coating, applied through a continuous coil-coating method, maintains exceptional


durability even when exposed to harsh weather conditions. The stone look series seamlessly integrates all the benefits of ALUCOLUX® and can be effortlessly processed. You can find these stone patterns available in widths of 1000mm, 1250mm, 1500mm and 1575mm.




A1001




A1002



A1003




A1004




A1005



A1006



A1007



A1008

N.B: Colours and patterns shown here may differ slightly with that on the actual panels

## EMBOSSED LOOK

With our advanced embossing technology, unique patterns on the pre-coated surface of ALUCOLUX® (6 coat system) can be achieved. Embossed surfaces and patterns are available on request.



N.B: Colours and patterns shown here may differ slightly with that on the actual panels

### GENERAL INFORMATION

ALUCOLUX® is a solid aluminium sheet that features multi-coat, multi-bake process on a continuous coil coating line using the highest grade of PVDF/FEVE paint system. The multiple layers are individually cured at temperatures of between 200-260°C. The quality of the coating is tested according to standards established by E.C.C.A. (European Coil Coating Association) of which 3A Composites is a member. Fluorocarbon (PVDF) coating systems combine good formability and excellent surface durability. They are extremely resistant to weathering, strong solar radiation and pollution.

The colour reproduction in this chart is subject to printing limitations. For exact colour matching, request actual colour samples.

To avoid possible reflection variations, it is recommended to install the panels in the same direction as marked on the protective peel-off-foil. Colour variations may occur between panels originating from different production batches. To ensure colour consistency, the total requirement for a project must be placed in one order.

For more information please refer to your nearest ALUCOLUX® representative or visit [www.alucolux.com](http://www.alucolux.com)